



Equipment for the Foodservice Industry

value + quality + service

## Work Top Freezer

FWDR1-27VC-L



### FWDR1-27VC-L

### Features


#### Features:

- Exterior & interior stainless steel construction
- Environmentally friendly R290 refrigerant
- Heavy duty Embraco compressor
- Self-closing and stay open door
- Efficient refrigeration system holds -8°F to 1°F (-22°C to -18°C)
- Recessed door handle
- Removable gasket that is easy to clean and replace
- Casters for easy movement
- Pre-installed shelves

#### Warranty:

- Two year parts and labour; Five years on compressor. For full warranty details visit <https://www.efifoodequip.com/warranty-info.php>

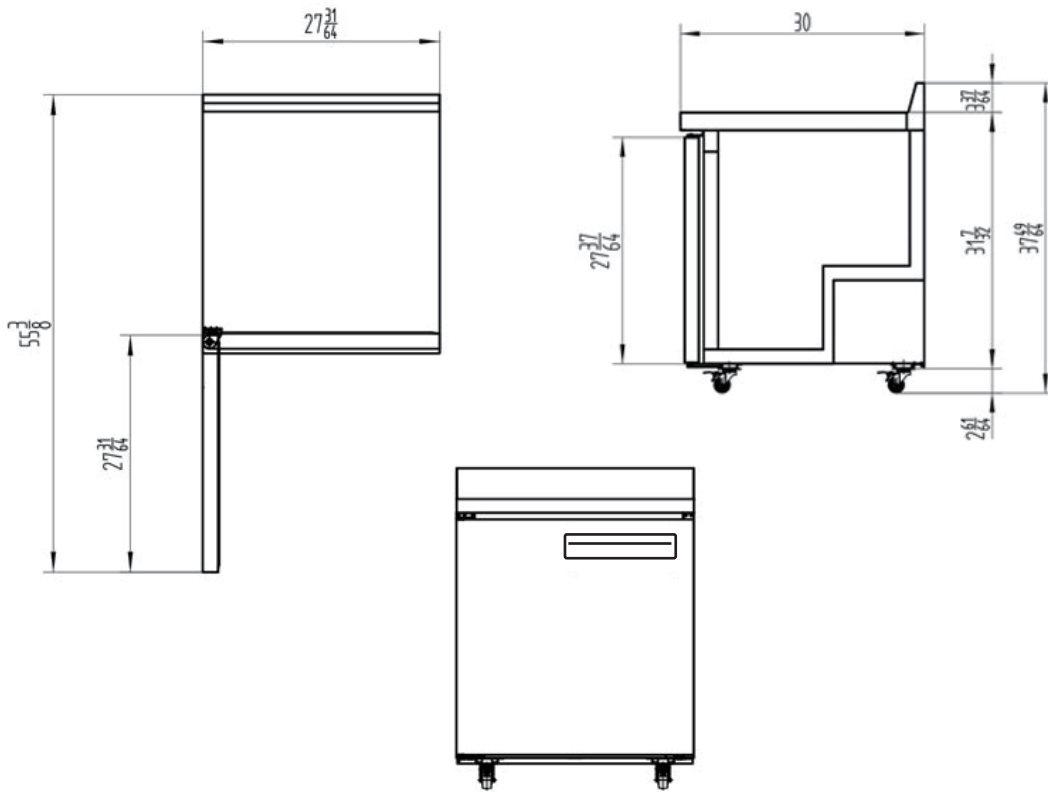

**FWDR1-27VC-L Specifications**

| Model        | Refrigerant | Doors | Shelves | Dimension<br>(mm)<br>(inch) |      |      | HP  | Voltage | Amps | Capacity<br>(L)<br>(Cu Ft.) | Net<br>Weight<br>(KG)<br>(LBS) | Temperature<br>Range |
|--------------|-------------|-------|---------|-----------------------------|------|------|-----|---------|------|-----------------------------|--------------------------------|----------------------|
|              |             |       |         | L                           | D    | H    |     |         |      |                             |                                |                      |
| FWDR1-27VC-L | R290        | 1     | 1       | 698                         | 762  | 959  | 1/5 | 115/60  | 1.8  | 202                         | 67                             | -8 ~ -1°F            |
|              |             |       |         | 27.5                        | 30.0 | 37.8 |     |         |      | 7.2                         | 147                            | -22 ~ -18°C          |

Equipped with one NEMA 5-15P plug 

**Shipping Information**

| Crate Dimensions<br>(mm)<br>(inch) |      |      | Net Weight<br>(KG)<br>(LBS) | Gross Weight<br>(KG)<br>(LBS) |
|------------------------------------|------|------|-----------------------------|-------------------------------|
| L                                  | D    | H    |                             |                               |
| 752                                | 831  | 1077 | 70                          | 84                            |
| 29.6                               | 32.7 | 42.4 | 154                         | 185                           |

Specifications subject to change without notice.