

## GR-2

### Two Door Reach-In Refrigerator

Glacier reach-in refrigerators are built to meet the needs of any foodservice application, delivering top performance without sacrificing style. The sleek design features recessed door handles, ensuring a comfortable grip and making it easy to wipe away food, grease and bacteria. A bottom-mounted compressor ensures efficient cooling, while digital controls let you adjust the temperature precisely. Self-closing doors and auto-defrosting help save energy and maintain temperature, while adjustable shelves and swivel casters make maintenance a breeze.



### Features

- Coved corners for easy cleaning
- Recessed door handle and door locks
- Self-closing doors with 90° stay open feature
- Digital temperature controls with LED display
- 4" casters with locks on front
- 8 adjustable and removable wire shelves
- Fits 18" x 26" sheet pans
- 2-year parts and labour warranty
- 5-year compressor warranty

### Technical Specifications


- Stainless steel exterior finish
- Stainless steel interior finish
- 115 V/60 Hz
- R290 refrigerant
- Automatic defrost

### Optional Features/Accessories

- Additional shelves available for purchase
- 3" casters available for purchase

## GR-2

### Two Door Reach-In Refrigerator

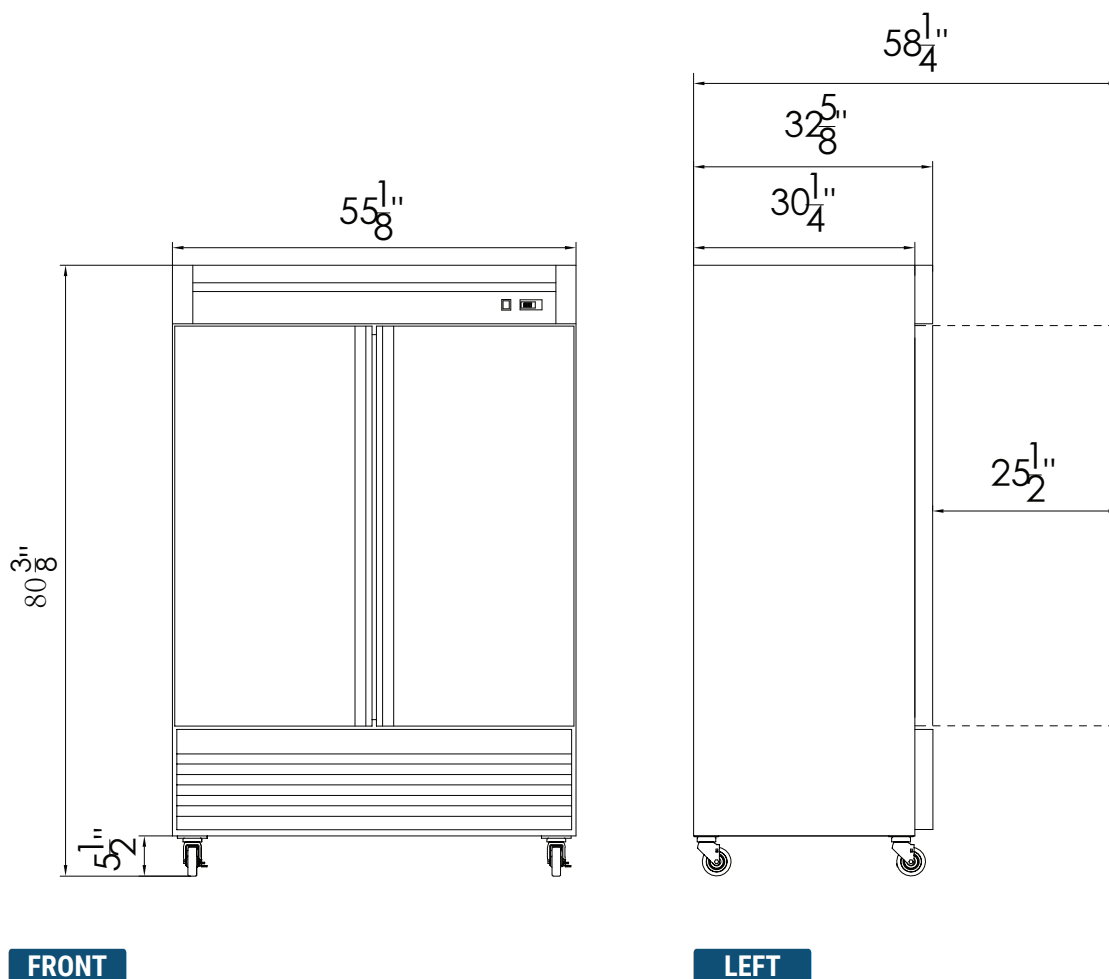

| Model | External Dimensions (inches) |        |        | Crated Dimensions (inches) |        |        | Temperature Range °F | Compressor Power (HP) | Net Weight | Gross Weight | # of Shelves | NEMA Config. | Amps |
|-------|------------------------------|--------|--------|----------------------------|--------|--------|----------------------|-----------------------|------------|--------------|--------------|--------------|------|
|       | W                            | D      | H      | W                          | D      | H      |                      |                       |            |              |              |              |      |
| GR-2  | 55 1/8                       | 32 5/8 | 80 3/8 | 56 3/4                     | 34 1/4 | 84 5/8 | 33 ~ 41°F            | 1/2                   | 463        | 528          | 8            | 5-15P        | 7.4  |

Specifications are subject to change without notice.