




SERVING YOU SINCE 1926

KASON FOOD SERVICE 31-A AMLAJACK BLVD. NEWNAN, GA 30265
1-800-935-2766 WWW.KASONIND.COM

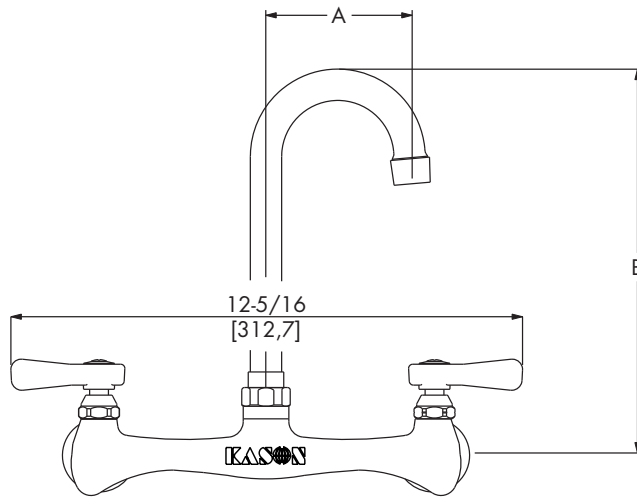

MODEL	DIM "A"	DIM "B"
455KL8001	3-1/2"	5"
455KL8002	6"	5-1/8"
455KL8003	8-1/2"	8-1/2"

ROUGH-IN: Ø 7/8" HOLES ON Ø 8" CENTERS

APPLICATION:

JOB NAME:

QUANTITY:

SPECIFIER NO:

PRODUCT NAME: 8" WALL MOUNT FAUCET, SELECT LINE



SPECIAL CONFIGURATION
CHECK BASE MODEL AND OPTIONS

MODEL:



455KL8001 W/ 3-1/2" GOOSENECK SWIVEL SPOUT



455KL8002 W/ 6" GOOSENECK SWIVEL SPOUT



455KL8003 W/ 8-1/2" GOOSENECK SWIVEL SPOUT

OPTIONS OR MODIFICATIONS:



SUPPLY LINES (24" OR
36" CIRCLE LENGTH)



INLET KIT



NIPPLES



ELBOWS



VANDAL RESISTANT KIT



HANDLES: CROSS STYLE



HANDLES: WRIST STYLE



CERAMIC CARTRIDGE



LOW FLOW AERATOR



SPOUT EXTENTIONS



OTHER _____

FEATURES:

*ECONOMICAL, COMMERCIAL FAUCETS.

*PROVIDE YEARS OF DEPENDABLE SERVICE.

MATERIALS:

*LOW LEAD BRASS ALLOY VALVE STEM, BONNETS, AND BODY.

*POLISHED, TRIPLE CHROME PLATED VALVE BODY AND SPOUT.

*POLISHED CHROME FINISHED TUBULAR BRASS SPOUTS.

*POLISHED CHROME FINISHED HIGH PRESSURE DIE-CAST ZINC
HANDLES WITH STAINLESS STEEL SCREWS.

MOUNTING:

*1/2"-14 NPT THREADED ECCENTRIC FEMALE INLETS

*Ø 7/8" MOUNTING HOLES

*8" CENTERS

SYSTEM LIMITS:

*TEMP: 40°F MIN. TO 140°F MAX

*PRESSURE 200 PSI MAX. STATIC

*1.80 GPM AT 60 PSI

APPROVALS:

DATE:


GreenGuard®





SERVING YOU SINCE 1926

KASON FOOD SERVICE 31-A AMLAJACK BLVD. NEWNAN, GA 30265
1-800-935-2766 WWW.KASONIND.COM

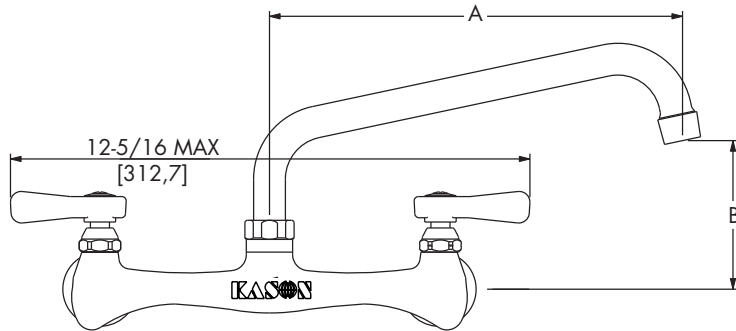

MODEL	DIM "A"	DIM "B"
455KL8006	6"	2-1/4"
455KL8008	8"	2-3/4"
455KL8010	10"	3-1/8"
455KL8012	12"	3-5/8"
455KL8014	14"	4"
455KL8016	16"	4-1/2"
455KL8118	18"	5-9/16"
ROUGH-IN: Ø 7/8" HOLES ON Ø 8" CENTERS		

APPLICATION:

JOB NAME:

QUANTITY:

SPECIFIER NO:

PRODUCT NAME: 8" SINGLE PANTRY FAUCET, SELECT LINE



SPECIAL CONFIGURATION
CHECK BASE MODEL AND OPTIONS

MODEL:

- ☐ 455KL8006 W/ 6" SWIVEL SPOUT
- ☐ 455KL8008 W/ 8" SWIVEL SPOUT
- ☐ 455KL8010 W/ 10" SWIVEL SPOUT
- ☐ 455KL8012 W/ 12" SWIVEL SPOUT
- ☐ 455KL8014 W/ 14" SWIVEL SPOUT
- ☐ 455KL8016 W/ 16" SWIVEL SPOUT
- ☐ 455KL8118 W/ 18" SWIVEL SPOUT

OPTIONS OR MODIFICATIONS:

- ☐ SUPPLY LINES (24" OR 36" CIRCLE LENGTH)
- ☐ INLET KIT
- ☐ NIPPLES
- ☐ ELBOWS
- ☐ VANDAL RESISTANT KIT
- ☐ HANDLES: CROSS STYLE
- ☐ HANDLES: WRIST STYLE
- ☐ CERAMIC CARTRIDGE
- ☐ LOW FLOW AERATOR
- ☐ SPOUT EXTENTIONS
- ☐ OTHER _____

FEATURES:

- *ECONOMICAL, COMMERCIAL FAUCETS.
- *PROVIDE YEARS OF DEPENDABLE SERVICE.

MATERIALS:

- *POLISHED CHROME PLATED LOW LEAD BRASS ALLOY VALVE BODY AND SPOUT.
- *CHROME PLATED LOW LEAD BRASS ALLOY VALVE STEMS AND BONNETS.
- *POLISHED CHROME PLATED ZINC DIE-CAST HANDLES WITH STAINLESS STEEL SCREWS.

MOUNTING:

- *1/2"- 14 NPS MALE INLETS
- *Ø 7/8" MOUNTING HARDWARE
- *8" CENTERS AND 3/8" COMPRESSION SLEEVES

SYSTEM LIMITS:

- *TEMP: 40°F MIN. TO 140°F MAX
- *PRESSURE 200 PSI MAX. STATIC
- *1.8 GPM AT 60 PSI

APPROVALS:

DATE:

GreenGuard®

