

ARCTIKO INT SF 500

true cooling specialists



LOW TEMPERATURE CHEST FREEZER I

STORES YOUR SAMPLES UNDER OPTIMAL CONDITIONS

The single compressor technology provides reliable low temperature freezing and high temperature uniformity.

► COOLING SYSTEM

Arctiko's SF 500 utilizes our single compressor technology. This means fewer mechanical components taking up space and lowering unnecessary heat and noise dissipation.

The technology ensures the best possible storage capacity per square meter of any chest freezer models in the market.

With Arctiko, you are maximizing the amount of samples you can store, while retaining the best possible cooling performance.

► OPTIMIZED STORAGE CAPACITY

The freezer has optimized internal storage for the best overlook. With the standard included stackable basket and the optional stainless steel front rack storage system the samples will be easy accessible at any time.

The freezer also has a premade access port with no extra cost involved, making it easier to monitor or inspect the unit with external probes.

► FILTERLESS CONSTRUCTION

Our filterless construction makes cleaning unnecessary. The evaporator coils are spaced so far apart that dust will not be trapped and obstruct the airflow.

The filterless construction eliminates the need for filters entirely, saving you maintenance time and cost.



SINGLE
COMPRESSOR
SYSTEM



FILTERLESS
CONSTRUCTION



NOISE
REDUCTION
TECHNOLOGY



Optimal storage capacity
and overview of the
stored samples
with the baskets.



The key lock on the
handle is a standard
feature in our SF Series
for optimal security for
your samples.

ARCTIKO INT SF 500


true cooling specialists

OPTIONAL FEATURES

The ARCTIKO SF 500 model supports following optional features:

- Temperature chart recorder
- Rollers on metal frame
- GSM alarm module
- Voltage converter
- Voltage stabilizer
- Racks & boxes
- Jumbo basket
- Basket

MAIN DIMENSIONS

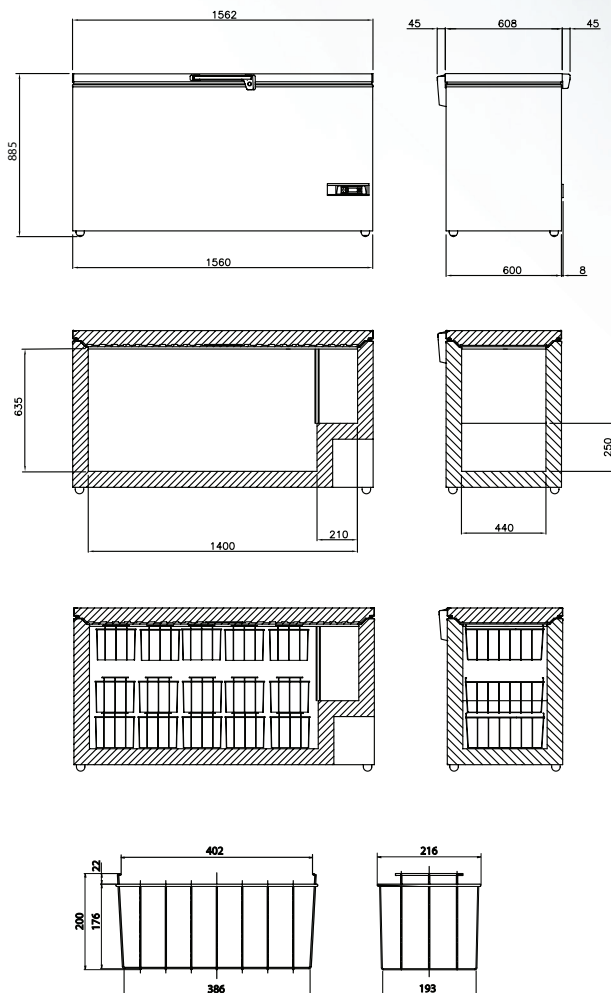

CERTIFICATES

ISO
ISO 9001:2015
Certificate No: 33037

ISO
ISO 13485:2016
Certificate No: 10000320341-PA-NA-NOR



MODEL	SF 500
Item code	US-SF 500
Temperature range (°C)	-30 / -60
Temperature range (°F)	-22 / -76
Max. ambient temperature (°C)	25
Max. ambient temperature (°F)	77
Capacity (L)	368
Capacity (cu. ft.)	13
Exterior dimensions WxDxH (mm)	1562x708x890
Exterior dimensions WxDxH (inches)	61,50x27,87x35,04
Interior dimensions WxDxH (mm)	1400x440x630
Interior dimensions WxDxH (inches)	55,12x17,32x24,80
Weight (kg)	88
Weight (lbs)	194
Insulation (mm)	80
Insulation (inches)	3,16
Cooling technology	static
Controller model / probe type	XR30CX / PT1000
Power	
Power supply (V)	110
Frequency (Hz)	60
Power consumption (kWh/24h)	9,13
AMP (A)	6,3
Power (Watt)	450
Horse power (HP)	1/2
Alarm functions	
Alarm display as text - not codes	no
Visual / acoustic alarm	yes
Power failure alarm	no
Adjustable high / low temperature alarm	yes
Open door alarm	no
Probe failure alarm	yes
Low battery alarm	no
Compressor failure alarm	no
Battery backup for alarms (approx. hrs.)	no
Data logging & external connection	
Voltage free contact for remote alarm (e.g. GSM alarm module)	yes
Electronic data logger	no
RS 485 port	no
USB port for software update & data download	no
Temperature chart recorder	optional
Display features	
Display type	LED display with touch buttons
Number of optional reference probes	no
Password protection for turning unit on / off	no
Temperature graph on display	no
Other features	
Automatic defrost	no
Vacuum release port	no
Access port for external probe etc. (int. diameter mm)	12
Access port for external probe etc. (int. diameter inches)	0,47
Light	no
Lock with key	yes
Castors (total pcs) / castors with brake (pcs)	4 / optional
Fixed feet (pcs) / levelling feet (pcs)	no
Sub lids / inner doors (pcs)	0
Baskets (pcs)	3
Max. no. of baskets (pcs)	15
Max. load per basket (kg)	14,5
Max. load per basket (lbs)	32
Total capacity of 50 mm / 2 inch boxes (pcs)	282
Total capacity of 75 mm / 3 inch boxes (pcs)	204
Total capacity of 96 mm / 3,8 inch boxes (pcs)	129
Refrigeration & cabinet	
Number of compressors	1
Refrigerant	EP88
Interior cabinet material	prepainted steel
Exterior cabinet material	prepainted steel
Colour (exterior cabinet)	white
Foam type	polyurethane
VIP vacuum insulated panels	no
Shipping	
Shipping weight (kg)	139
Shipping weight (lbs)	306
Shipping dimensions WxDxH (cm)	166x76x106
Shipping dimensions WxDxH (inches)	65,4x29,9x41,7
Shipping volume (m³)	1,34
Shipping volume (cu. ft.)	47,32

Actual performance of products may vary upon various factors. All rights to this temperature mapping belong to Arctiko A/S. The drawing may not be copied nor presented to any other person without prior written consent of Arctiko A/S.