



Equipment for the Foodservice Industry

value + quality + service

## X-LINE 28" Glass Single Door Black Cooler

Model No:  
**C1-28GDVCX**



### C1-28GDVCX

### Features


#### Features:

- CABINET CONSTRUCTION
  - Exterior - coated steel
  - Interior - attractive, aluminum liner with stainless steel floor
- Rounded corner design inside of the cabinet makes it easy to clean the inside storage room
- Self-closing double pane glass door with positive seal, torsion type closure system
- R290 Refrigeration system holds 33°F to 41°F (0°C to 5°C)
- Adjustable temperature set point and defrost frequency
- Adjustable, heavy duty PVC coated shelves
- LED light
- "No stoop" lower shelf
- Easily accessible condenser coil for cleaning, and easy service access
- Simple installation with no plumbing required

#### Warranty

- Two year parts and labour; Five years on compressor. For full warranty details visit <https://www.efifoodequip.com/warranty-info.php>

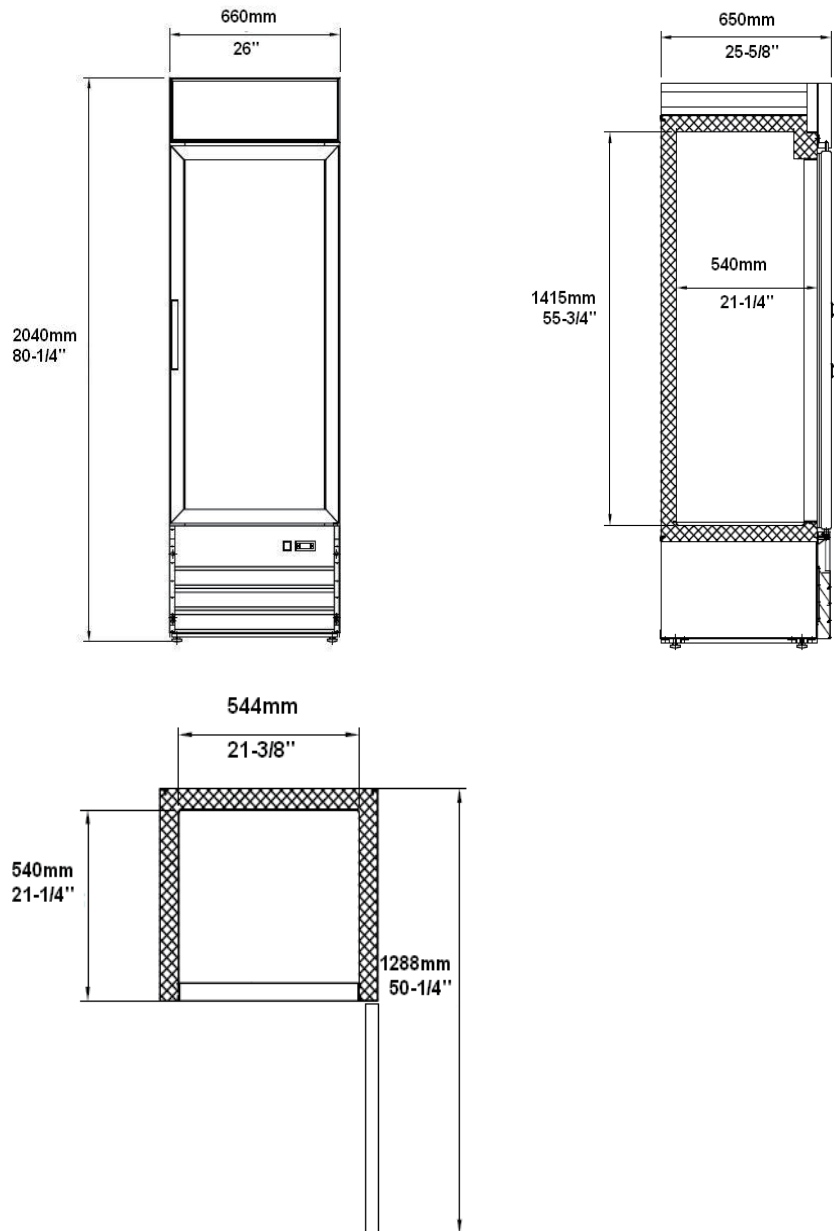

**C1-28GDVCX****Specifications**

| Model      | Doors | Shelves | Dimension<br>(mm)<br>(inch) |      |      | HP   | Voltage  | Amps | Capacity<br>(L)<br>(Cu Ft.) | Net Weight<br>(KG)<br>(LBS) | Temperature<br>Range | NEMA<br>Config.                                                                             |
|------------|-------|---------|-----------------------------|------|------|------|----------|------|-----------------------------|-----------------------------|----------------------|---------------------------------------------------------------------------------------------|
|            |       |         | W                           | D    | H    |      |          |      |                             |                             |                      |                                                                                             |
| C1-28GDVCX | 1     | 4       | 660                         | 650  | 2125 | 1/4+ | 115/60/1 | 2.88 | 348                         | 138                         | 0.5 ~ 5°C            | 5-15P  |
|            |       |         | 26                          | 25.6 | 83.7 |      |          |      | 13                          | 304                         | 33 ~ 41°F            |                                                                                             |

Specifications subject to change without notice.