


Encore® 4" (102mm) Deck Mount Faucet  
 with Rigid Gooseneck Spout and  
 Lever Handles

## KL41-4x0x-RE1 Series

KL41-4100-RE1 3" spout, ceramic valves  
 KL41-4000-RE1 3" spout, compression valves  
 KL41-4101-RE1 8" spout, ceramic valves  
 KL41-4001-RE1 8" spout, compression valves  
 KL41-4102-RE1 6" spout, ceramic valves  
 KL41-4002-RE1 6" spout, compression valves

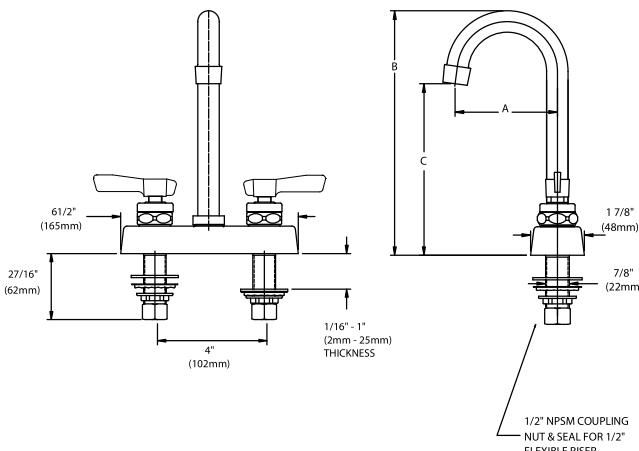

Dimensions shown in inches (mm) are for reference only  
 and are subject to change.

1-1/8" (29mm) holes for deck are recommended to  
 accommodate 1/2" supply nipples. 1/2" NPSM Male Inlets  
 Operating Temperature: 40 - 180°F (5 - 83°C)  
 Operating Pressure: 15 - 125psi

Approximate shipping weight - 5 lbs  
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality.

### Commercial Quality Features

- Rigid gooseneck spout design
- ADA-compliant lever handles
- Built-in check valves to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

### SPECIFICATIONS:

Deck Mount Faucet to be Encore KL41 Series in the following configuration:

\_\_\_\_ KL41-4100-RE1 3" spout, ceramic valves  
 \_\_\_\_ KL41-4000-RE1 3" spout, compression valves  
 \_\_\_\_ KL41-4101-RE1 8" spout, ceramic valves  
 \_\_\_\_ KL41-4001-RE1 8" spout, compression valves  
 \_\_\_\_ KL41-4102-RE1 6" spout, ceramic valves  
 \_\_\_\_ KL41-4002-RE1 6" spout, compression valves

Faucet body to be constructed of polished chrome plated brass with lever handles. Supply inlets to be 4" on center. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel rigid gooseneck style with leak proof double O-ring seal design. Color coded temperature indexes shall meet international standards. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL41-4100-RE1	3-1/2"(89 mm)	8-5/16"(211mm)	6-1/16"(154mm)
KL41-4000-RE1	3-1/2"(89 mm)	8-5/16"(211mm)	6-1/16"(154mm)
KL41-4101-RE1	8-1/2"(216mm)	12-1/16"(306mm)	6-5/16"(160mm)
KL41-4001-RE1	8-1/2"(216mm)	12-1/16"(306mm)	6-5/16"(160mm)
KL41-4102-RE1	6"(152mm)	9-3/16"(233mm)	5-1/2"(140mm)
KL41-4002-RE1	6"(152mm)	9-3/16"(233mm)	5-1/2"(140mm)

For a complete list of available options for KL41-4000 Series,  
 see product configurator on reverse.

**COMPLIES WITH:**  
 THE FEDERAL "REDUCTION OF LEAD  
 IN DRINKING WATER ACT" -  
 2011 - US SENATE BILL NO. S.3874  
 NSF/ANSI 61/9, ANNEX G



## Faucet Configuration for KL41-4000 Series

