

G-Series Gas Range-Match Broiler

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- G18-BRL
- G24-BRL
- G30-BRL
- G36-BRL
- G48-BRL



G24-BRL

Standard Features

- Stainless steel front, sides, front rail, grease hopper and side splash guard
- Stainless steel low profile backguard
- Counter-mount or range-matched to Garland G-series ranges (when combined with optional stand or cabinet base)
- Exclusive lift-off hopper top
- Removable broiling grates in 6" (152mm) wide sections.
- Dual-sided cast-iron broiler racks, with 1/2" (13mm) rounded bar (broad) and diamond (fine) patterns on opposite sides, in of 6" (152mm) wide sections.
- Heavy-duty ceramic briquettes
- Large, heavy-duty knobs
- 4" (102mm) sanitary legs for counter mount installations
- Simple set Hi/Lo valves
- Piezo spark pilot ignition
- Gas pressure regulator
- 3/4" N.P.T. rear gas connection
- 15,000 BTU cast-iron burners for every 6" (152mm) of broiler width.
- Natural or propane gas, specify when ordering

Options & Accessories

- Diamond branding rack in lieu of standard rack
- Stainless steel splatter guard 18" (457mm) to 48" (1219mm), specify width
- Nickel-plated wire-type holding shelves which attach to splatter guards, available in 18" (457mm), 24" (610 mm) & 36" (914mm)
- Stands and floor bases available

Specifications

Range-match broilers in available five widths: 18" (457mm), 24" (610mm), 30" (762mm), and 36" (914mm) and 48" (1219mm), designed to match G-series ranges.

Stainless steel front, sides and backguard.

Exclusive lift-off stainless steel grease hopper.

Cast-iron broiler racks with 1/2" (13mm) round bar broad branding on one side and fine diamond branding pattern on reverse in 6" (152mm) wide sections.

Dual diamond pattern steel racks are available in lieu of standard broiler racks

Simple set Hi-Lo valves are located away from heat and protected.




15,000 BTU cast-iron burners for every 6" (152mm) of broiling space, natural or propane gas.

Optional cabinet BRL-CAB or open frame stand BRL-STD see specification form BRL-STD.



G-Series Gas Range-Match Broiler

G-Series Gas Range-Match Broiler

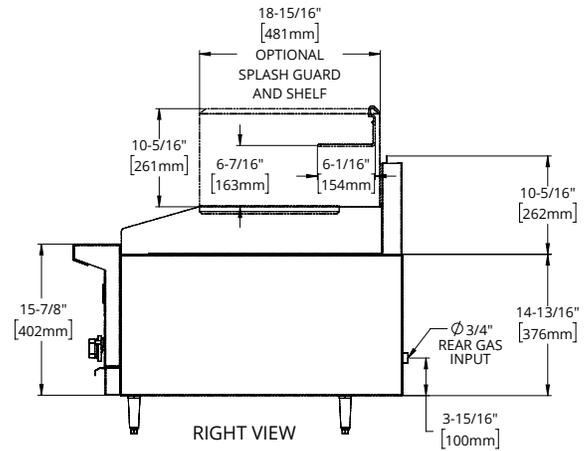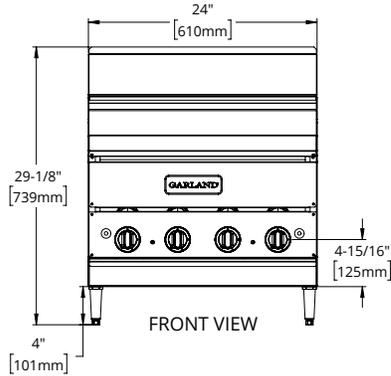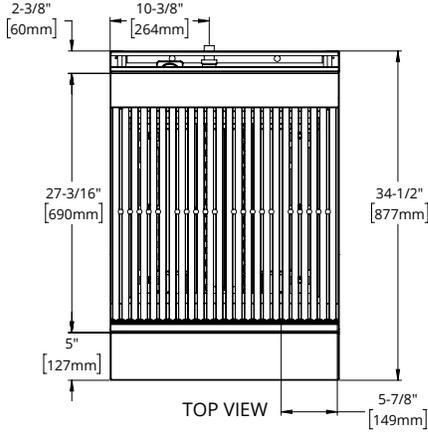

Gas input ratings shown for installations up to 2000 ft., (610m) above sea level. Please specify altitudes over 2000 ft.

This product is not approved for residential use.

Note: Installation clearance reductions are applicable only where local codes permit.

MODEL	Exterior Dimensions			Total Input Rating (Natural Gas)		Shipping	
	Height w/O Legs	Width	Depth	BTU	kW	Cu Ft	lb/Kg
G18-BRL	25-1/8" (638mm)	18" (457mm)	34-1/2" (876mm)	45,000	13.2	21	190/86
G24-BRL	25-1/8" (638mm)	24" (610mm)	34-1/2" (876mm)	60,000	17.6	21	240/109
G30-BRL	25-1/8" (638mm)	30" (762mm)	34-1/2" (876mm)	75,000	22	29.5	290/131
G36-BRL	25-1/8" (638mm)	36" (914mm)	34-1/2" (876mm)	90,000	26.4	29.5	340/154
G48-BRL	25-1/8" (638mm)	48" (1219mm)	34-1/2" (876mm)	120,000	35.2	37	375/170

MODEL	Installation Clearances Noncombustible Surfaces Only		Manifold Operating Pressure "wc/mbar		Gas Inlet
	Sides	Rear	Natural	Propane	
All Models	0"	0"	4.5/11	10/24.9	3/4"

Garland reserves the right to make changes to the design or specifications without prior notice.