

# G Series Infra-Red Salamander Broiler

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

## Models

- GIR36C                      • GIR48
- GIR36                     • GIR60



Model GIR36

## Standard Features

- Range mount models – stainless steel top front, sides, backsplash, and bottom w/heat shield
- Counter mount GIR36C – stainless steel top, front, and sides – C/W 4" (102mm) legs
- 1/2" NPT top gas inlet
- Two (2) 20,000 BTU (5.86 kW) atmospheric infrared burners
- Two (2) individual Hi-Lo valve controls
- Three (3) position spring- balanced, adjustable rack assembly
- Large capacity removable grease pan
- Gas pressure regulator
- One year limited parts & labor warranty (USA & Canada only)

## Options & Accessories

- Wall-mounting kit and stainless steel main bottom w/heat shield for model GIR36C
- Rear gas inlet (standard on counter model GIR36C)
- Interconnecting gas piping for range-mount models GIR36, 48, & 60
- Available to fit all Garland G Series ranges from 36"-60" (900mm-1500mm) wide; standard on left, right optional on 60" (1500mm) ranges – specify
- Stainless steel back


## Specifications

Range mount gas infra-red salamander broiler Model GIR \_\_\_\_\_. Available to mount over Garland Starfire Pro G Series restaurant ranges 36"- 60" (900-1500mm) wide. Two (2) 20,000 BTU (5.86 kW) atmospheric infra-red burners. Three (3) position adjustable rack. Stainless steel top, front, sides, backsplash, and bottom w/heat shield. 40,000 BTU (11.72 kW) total. Natural or propane gas. Certified to Canadian and US Standards, listed by NSF.





G Series Infra-Red Salamander Broiler

# G Series Infra-Red Salamander Broiler

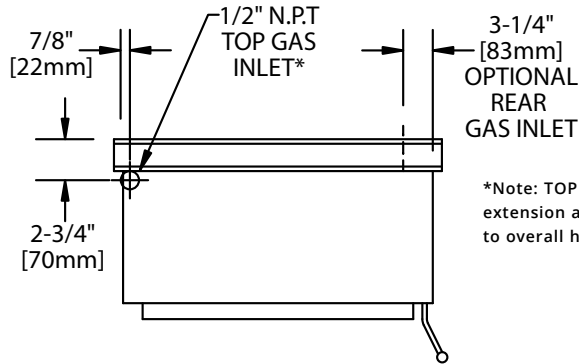

\*Note: TOP GAS INLET pipe extension adds 4" (258mm) to overall height.

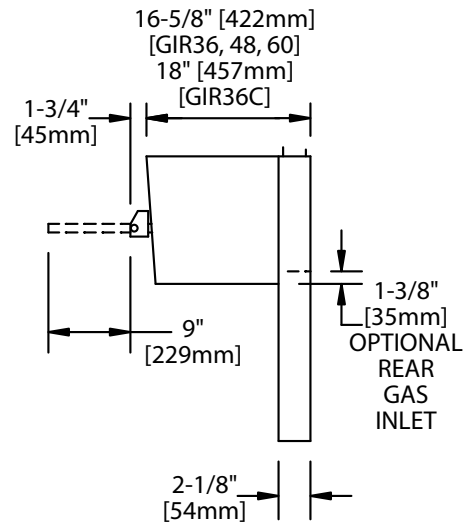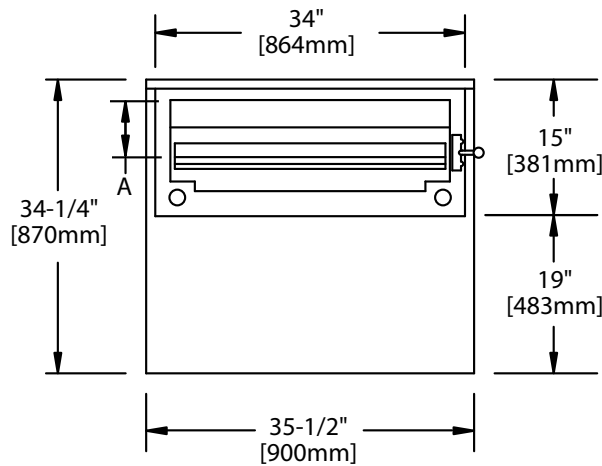

| Rack Position |         | Opening Height to Cook Surface (A) |
|---------------|---------|------------------------------------|
| 3             | Highest | 2-3/4" (70mm)                      |
| 2             | Middle  | 3-1/2" (87mm)                      |
| 1             | Lowest  | 4-3/8" (111mm)                     |

| Model  | Width                                                                                          | Use With<br>G Series Model | Shipping Information |         | Entry Clearances: In (mm) |          |
|--------|------------------------------------------------------------------------------------------------|----------------------------|----------------------|---------|---------------------------|----------|
|        |                                                                                                |                            | Cu Ft                | lbs/Kg  | Crated                    | Uncrated |
| GIR36C | 34" (864mm)                                                                                    | N/A                        | 21                   | 170/77  | 29(737)                   | 21(533)  |
| GIR36  | 35-1/2" (900mm)                                                                                | G36                        | 38.2                 | 200/91  | 29(737)                   | 21(533)  |
| GIR48  | 47-1/4" (1200mm)<br>(35-1/2" /900mm center mounted broiler<br>with 47-1/4" /1200mm flue riser) | G48                        | 60.6                 | 230/105 | 29(737)                   | 21(533)  |
| GIR60* | 59" (1500mm)<br>(35-1/2" /900mm broiler + 24" /610mm flue riser w/shelf)                       | G60                        | 60.6                 | 260/118 | 29(737)                   | 21(533)  |

\* Note Salamander Broiler on Left Side. Right Side Optional

| Operating Pressure |                | Installation Clearances |           | Total Input            |
|--------------------|----------------|-------------------------|-----------|------------------------|
| Natural            | Propane        | Sides                   | Rear      |                        |
| 6"WC (15mbar)      | 10"WC (25mbar) | 6"(152mm)               | 6"(152mm) | 40,000 BTU/HR (11.7Kw) |

Gas input ratings shown for installations up to 2000 ft., (610m), above sea level. Please specify altitudes over 2000 ft. Please specify gas type when ordering.

Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

Welbilt reserves the right to make changes to the design or specifications without prior notice.

**Garland Commercial Ranges Ltd.**  
1177 Kamato Road,  
Mississauga, Ontario  
L4W 1X4 CANADA

**General Inquires 1-905-624-0260**  
USA Sales, Parts and Service 1-800-424-2411  
Canadian Sales 1-888-442-7526  
Canada or USA Parts/Service 1-800-427-6668

[www.garland-group.com](http://www.garland-group.com)  
6935  
12/18