

# SE40eHC

## Sliding Door Display Refrigerator

Project Name: \_\_\_\_\_

Item#: \_\_\_\_\_ - Quantity: \_\_\_\_\_



Width*	Depth**	Height***	Shelves	Cold Space™	Ship Weight	Ship Cube	Cooling Capacity	Electrical
47 1/2" 1207 mm	31" 788 mm	72 5/8" 1845 mm	6	40	378 lbs 171 kg	73 cu. ft 2.07 m <sup>3</sup>	1/4 HP	115V/3.7 Amp/60 Hz - Single Phase -NEMA5-15P, Dedicated Circu

\* Add 1/4" (7mm) for Door Handles. \*\*\* Add 3/8" (10mm) for Threaded-In Levelers. Millimeters rounded up.

### Premium Features



Cassette™ Refrigeration


 Finless Free&Clear •  
Condenser Coil


LED Lighting System



Easy-Glide Door System


 Automatic Stainless Steel  
Condensate Control System


Priority Air-Flow

## SE40eHC: Designed to enhance the refrigerated storage or display experience to the highest standards of quality and performance.


### Refrigeration:

- Self contained Cassette® forced-air refrigeration employs R290 hydrocarbon Natural Refrigerant within a sealed capillary tube system.
- Cassette® refrigeration is bottom-mounted and removable from the front for ease of maintenance. Refrigeration may be exchanged or upgraded without mechanic. Designed to operate at a set point between 34°F and 39°F (1°C-4°C).
- Priority, directed air flow provides optimum cooling and energy efficiency within cabinet and exclusively at front of unit for optimized heat exchange ventilation.
- Finless, Free&Clear™ Condenser Coil maximizes air-flow over the compressor, reduces energy consumption and is non-clogging.
- Automatic, stainless steel condensate control system.
- Quality, self-lubricating and sealed motors with streamlined air-flow provide quieter yet robust refrigeration.




### Cabinet:

- Exterior – durable appliance white.
- Interior – NSF approved white aluminum liner with stainless steel coved corner floor.
- Ergonomic raised interior floor.
- Insulation – cabinet is foamed-in-place with eco-conscious, polyurethane insulation.
- Heavy duty thread-in leveler legs.

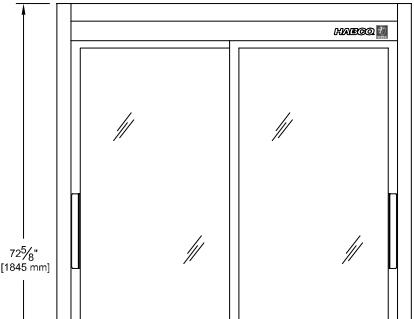

### Doors:

- Easy-Glide, Self-Closing Sliding Doors are suspended on large nylon-tired roller bearings, with spring assist and magnetic cabinet side seals.
- Magnetic gaskets are single piece bead-mount construction easily removable for cleaning.
- Durable, injection molded external door handle(s).

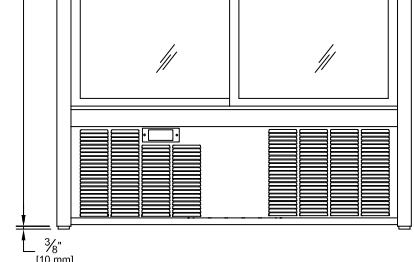

### Lighting:

- Energy Efficient LED Lighting System for sparkling Illuminated Interior Display, on Switch.


### Storage:

- Six (6) white coated shelves 21 1/2"W x 20 1/2"D (547mm x 521mm), are NSF approved.
- Heavy duty aluminum shelving pilasters will not peel or chip adjustment of 1/2" (13mm) increments.
- NSF-7 compliant for storage and display of open food product.



### Electrical:

- Factory power cord installed for connection to a sole-use (dedicated) 115V/60Hz/1-Phase, 15 Amp circuit.

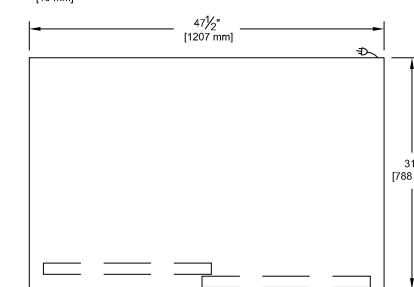

HABCO MANUFACTURING INC. 501 GORDON BAKER ROAD, TORONTO, ONTARIO, CANADA, M2H 2S6

Toll Free CAN: 1-800-387-5398 USA: 1-800-448-0244 Fax: 416-491-6982 [www.habcomfg.com](http://www.habcomfg.com)