

U.S. Range

U-Series 24" Gas Restaurant Range

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

Models

- U24-4L
- U24-2G12L
- U24-G24L
- U24-4S
- U24-2G12S
- U24-G24S



Model U24-4L

Standard Features

- Large 27" (686mm) work top surface
- Stainless steel front and sides
- Stainless steel 5" (127mm) plate rail
- Stainless steel backguard, w/ removable stainless steel shelf
- 12" (305mm) section stamped drip trays w/ dimpled bottom
- 6" (152mm) adj. stainless steel legs
- Large phenolic knobs
- Gas regulator
- Easy to access oven pilot
- Reinforced chassis

Standard on Applicable Models:

- Open storage in lieu of oven, (suffix S)
- Ergonomic split cast-iron top ring grates
- Powerful 32,000 BTU/9.37 kW 2-piece cast-iron geometric open top burner
- 5/8" (15mm) thick steel griddle plate w/ manual hi/lo valve control, 23" (584mm) working depth surface, standard on right, optional on left
- 4-1/4" (108mm) wide grease trough
- 18,000 BTU/5.27 kW cast-iron "H" style griddle burner per 12" (305mm) width of griddle
- 32,000 BTU/9.37 kW cast-iron "H" style oven burner
- Space-saver oven w/ ribbed porcelain bottom & door interior, aluminized steel top, sides and back
- Snap-action modulating oven thermostat low to 500° F
- Nickel-plated oven rack and 3-position

- removable oven rack guides
- Square-cornered door design with strong, "keep-cool" oven door handle

Options & Accessories

- Snap-action modulating griddle control 175° to 425° F
- Hot top 12" (305mm) plate in lieu of two open burners, manual valve controlled w/ 18,000 BTU/5.27 kW cast-iron "H" burner standard on left side
- Low-profile 9-3/8" (238mm) backguard stainless steel front and sides
- Additional oven racks
- Four 6" (152mm) levelling swivel casters w/ front locking
- Flanged deck mount legs
- Celsius temperature dials
- Piezo spark ignition for pilots on griddles

Specifications

Gas restaurant series range with space-saver oven.
23-5/8" (600mm) wide and 27" (686mm) deep work top surfaces.
Stainless steel front, sides and 5" wide front rail.
6" (152mm) legs with adjustable feet.
Four powerful 2 piece 32,000 BTU/9.37 kW (Natural gas), cast-iron open burners set in split-cast iron ergonomic grates.
Griddle or optional hot top with cast-iron "H" style burners, 18,000 BTU/5.27 kW (natural gas), in lieu of open burners.
Porcelain oven bottom and door liner.
Durable heavy-duty oven door w/ "keep-cool" handle.

Heavy cast-iron "H" oven burner 32,000 BTU/9.38 kW (natural gas)

Oven burner controlled by even bake, fast recovery snap-action modulating oven thermostat.

Available with storage base in lieu of oven

NOTE: Use only Garland certified casters and approved restraining devices.



Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668




www.garland-group.com
8092B
03/26



U-Series 24" Gas Restaurant Range

U.S. Range

U-Series 24" Gas Restaurant Range

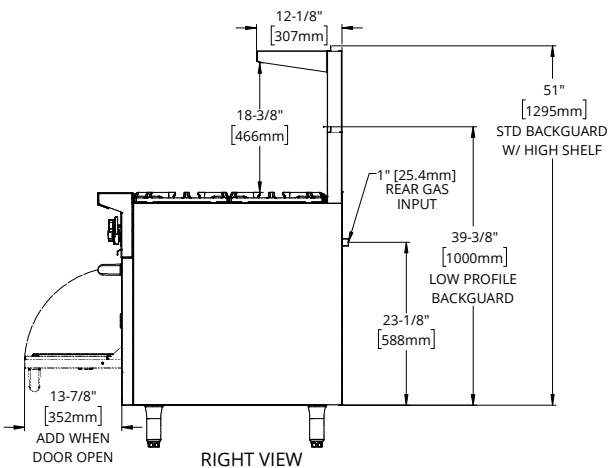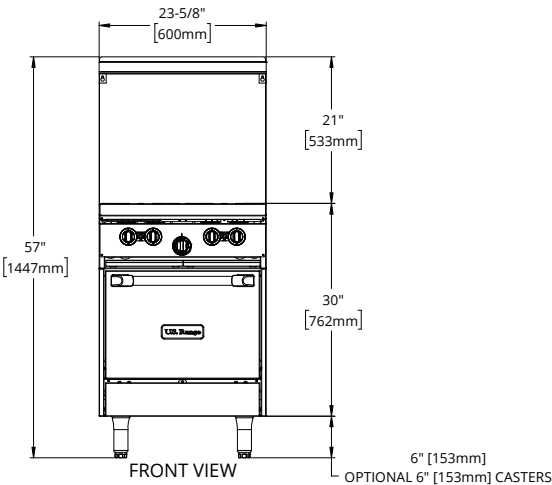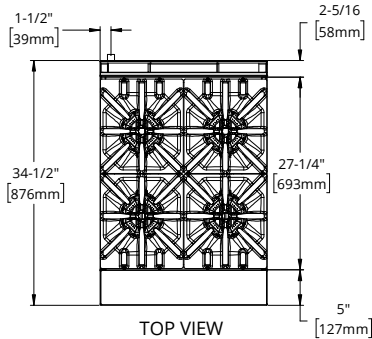

Gas input ratings shown for installations up to 2000 ft., (610m) above sea level. Please specify altitudes over 2000 ft.

This product is not approved for residential use.

Note: Installation clearance reductions are applicable only where local codes permit.

Model Number	Description	Total BTU/Hr Natural Gas	Shipping Information		
			Lbs.	Kg	Cu Ft
U24-4L	Four Open Burners w/Space-Saver Oven	160,000	302	137	29
U24-4S	Four Open Burners w/Storage Base	128,000	221	100	29
U24-2G12L	12" Griddle, Two Open Burners w/Space-Saver Oven	114,000	332	151	29
U24-2G12S	12" Griddle, Two Open Burners w/Storage Base	82,000	251	114	29
U24-G24L	24" Griddle w/Space Saver Oven	68,000	367	166	29
U24-G24S	24" Griddle w/Storage Base	36,000	286	130	29

Width	Depth	Height w/ Shelf	Oven Interior			Combustible Wall Clearance		Entry Clearances	
			Height	Depth	Width	Sides	Rear	Crated	Uncrated
23-5/8" (600mm)	34-1/2" (876mm)	57" (1448mm)	13" (330mm)	26" (660mm)	20" (508mm)	14" (356mm)	6" (152mm)	25" (635mm)	24-1/2" (622mm)

Burner Ratings (BTU/Hr/kW)			
Gas	Open Top	Griddle/Hot Top	Oven
Natural	32,000/9.37	18,000/5.27	32,000/9.37
Propane	26,000/7.61	18,000/5.27	28,000/8.20

Manifold Operating Pressure	
Natural	Propane
4.5" WC 11 mbar	10" WC 25 mbar

Garland/US Range reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
8092B
03/26

