

U.S. Range

U-Series 60" Gas Restaurant Range

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

Models

- | | | | | |
|--------------|--------------|--------------|--------------|-------------|
| • U60-10RR | • U60-8G12RS | • U60-6G24SS | • U60-2G48RR | • U60-G60RS |
| • U60-10RS | • U60-8G12SS | • U60-4G36RR | • U60-2G48RS | • U60-G60SS |
| • U60-10SS | • U60-6G24RR | • U60-4G36RS | • U60-2G48SS | |
| • U60-8G12RR | • U60-6G24RS | • U60-4G36SS | • U60-G60RR | |



Model U60-10RR

Standard Features

- Large 27" (686mm) work top surface
- Stainless steel front and sides
- Stainless steel 5" (127mm) plate rail
- Stainless steel backguard, w/ removable stainless steel shelf
- 12" (305mm) section stamped drip trays w/ dimpled bottom
- 6" (152mm) adj. stainless steel legs
- Large phenolic knobs
- Gas regulator
- Easy to access oven pilot
- Reinforced chassis

Standard on Applicable Models:

- Open storage in lieu of oven, (suffix S)
- Ergonomic split cast-iron top ring grates
- Powerful 32,000 BTU/9.37 kW 2-piece cast-iron geometric open top burner
- 5/8" (15mm) thick steel griddle plate w/ manual hi/lo valve control, 23" (584mm) working depth surface, standard on right, optional on left
- 4-1/4" (108mm) wide grease trough
- 18,000 BTU/5.27 kW cast-iron "H" style griddle burner per 12" 305mm width of griddle
- 38,000 BTU/11.13 kW cast-iron "H" style oven burner
- Snap-action modulating oven thermostat low to 500° F
- Nickel-plated oven rack and 3-position removable oven rack guide
- Large oven w/ porcelain ribbed

bottom & door, aluminized steel top, sides and back; standard oven fits standard sheet pans in both directions

- Square-cornered door design with strong, "keep-cool" oven door handle

Options & Accessories

- Snap-action modulating griddle control 175° to 425° F
- Hot top 12" (305mm) plate in lieu of two open burners, manual valve controlled w/ 18,000 BTU/5.27 kW cast-iron "H" burner standard on left side
- Low-profile 9-3/8" (238mm) backguard stainless steel front and sides
- Additional oven racks
- Four 6" (152mm) levelling swivel casters w/ front locking
- Flanged deck mount legs
- Celsius temperature dials
- Piezo spark ignition for pilots on griddles

Specifications

Gas restaurant series range with large capacity standard oven.

35 7/16" (900mm) wide, 27" (686mm) deep worktop surfaces.

Stainless steel front, sides and 5" wide front rail.

6" (152mm) legs with adjustable feet.

Ten powerful 2-piece 32,000 BTU/9.37 kW (Natural Gas), cast-iron open burners set in split cast-iron ergonomic grates.

Griddle or optional hot top with cast-iron "H" style burners, 18,000 BTU/5.27 kW (natural gas), in lieu of open burners.

Porcelain oven bottom and door liner and heavy-duty,

"keep-cool" door handle.

Heavy cast-iron "H" oven burner rated 38,000 BTU/11.13 kW (natural gas)

Oven controlled by even bake, fast recovery snap-action modulating oven thermostat.

Available with storage base in lieu of oven(s).

NOTE: Use only Garland certified casters and approved restraining devices.



Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668


www.garland-group.com
8095B
03/26



U-Series 60" Gas Restaurant Range

U.S. Range

U-Series 60" Gas Restaurant Range

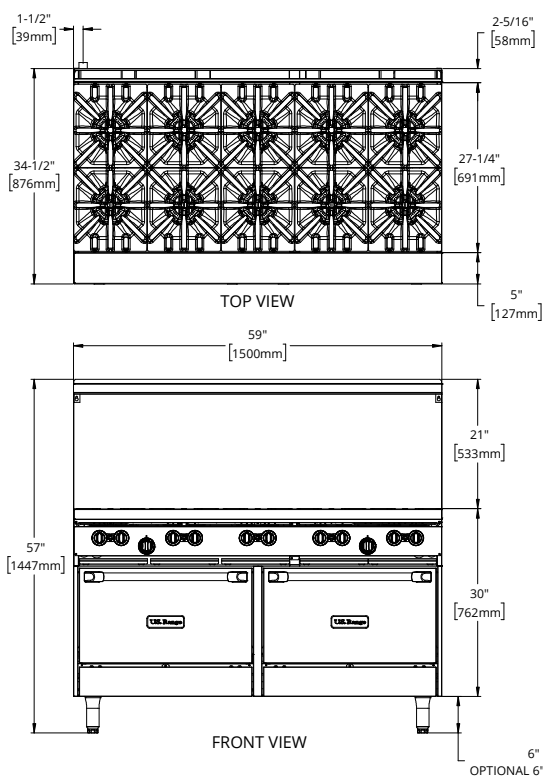

Gas input ratings shown for installations up to 2000 ft., (610m) above sea level. Please specify altitudes over 2000 ft.

This product is not approved for residential use.

Note: Installation clearance reductions are applicable only where local codes permit.

Model Number	Open Burners	Griddle	Oven(s)	Total BTU/Hr Natural	Ship Wt.	
					Lbs.	Kg
U60-10RR	10	—	(2) 26"	396,000	726	329
U60-10RS	10	—	(1) 26"	358,000	690	312
U60-10SS	10	—	—	320,000	581	264
U60-8G12RR	8	12"	(2) 26"	350,000	756	343
U60-8G12RS	8	12"	(1) 26"	312,000	720	327
U60-8G12SS	8	12"	—	274,000	611	277
U60-6G24RR	6	24"	(2) 26"	304,000	791	359
U60-6G24RS	6	24"	(1) 26"	266,000	755	342
U60-6G24SS	6	24"	—	228,000	646	293

Shipping volume, all models=79 Cu Ft

Model Number	Open Burners	Griddle	Oven(s)	Total BTU/Hr Natural	Ship Wt.	
					Lbs.	Kg
U60-4G36RR	4	36"	(2) 26"	258,000	826	375
U60-4G36RS	4	36"	(1) 26"	220,000	790	358
U60-4G36SS	4	36"	—	182,000	681	309
U60-2G48RR	2	48"	(2) 26"	212,000	851	386
U60-2G48RS	2	48"	(1) 26"	174,000	815	370
U60-2G48SS	2	48"	—	136,000	706	320
U60-G60RR	—	60"	(2) 26"	166,000	866	393
U60-G60RS	—	60"	(1) 26"	128,000	830	376
U60-G60SS	—	60"	—	90,000	721	327

Width In (mm)	Depth In (mm)	Height w/shelf In (mm)	Oven Interior-in (mm)			Combustible Wall Clearance-In (mm)		Entry Clearances In (mm)		Manifold Operating Pressure	
			Height	Depth	Width	Sides	Rear	Crated	Uncrated	Natural	Propane
59-1/16 (1500)	34-1/2 (876)	57 (1448)	13 (330)	26 (660)	26-1/4 (667)	14 (356)	6 (152)	37 (940)	36-1/2 (927)	4.5" WC 11 mbar	10" WC 25 mbar

Burner Ratings (BTU/Hr/kW)			
Gas Type	Open Top	Griddle/Hot Top	Standard Oven or Convection
Natural	32,000/9.37	18,000/5.27	38,000/11.13
Propane	26,000/7.61	18,000/5.27	32,000/9.38

Garland/US Range reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
 1177 Kamato Road,
 Mississauga, Ontario
 L4W 1X4 CANADA

General Inquires 1-905-624-0260
 USA Sales, Parts and Service 1-800-424-2411
 Canadian Sales 1-888-442-7526
 Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
 8095B
 03/26

